

NEWMAT
CLASSIC

NEWLIGHT

NEWGRAPHIC

NEWLINE

BIOPRUF

BATINEWLINE

MIR.O.DAL



NEWCLIP

newmat® NEWACOUSTIC

ACOUSTIC STRETCH CEILINGS

PLAFOND TENDU ACOUSTIQUE

AKUSTISCHE SPANNDECKE

EEN AKOESTISCH GELUIDDEMPEND

SPANPLAFOND

SOFFITTO TESO ANTI-RUMORE

TECHOS TENSADOS ACÚSTICOS

АКУСТИЧЕСКИЙ НАТЯЖНОЙ

ПОТОЛОК

TECTO ESTENDIDO ACUSTICO

Ηχητικές Ελαστικές Οροφές



NEWACOUSTIC membrane without acoustic liner .



Recommended by **NEWMAT**

NEWACOUSTIC
double layer of membrane



AlphaW = 0.65

NRC = 0.55

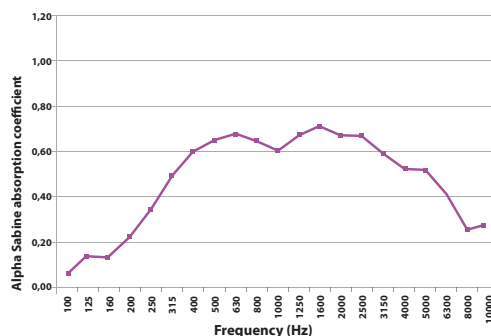
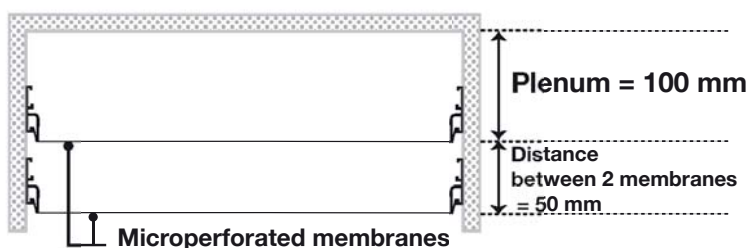
Recommended by **NEWMAT**

NEWACOUSTIC
membrane only



AlphaW = 0.45

NRC = 0.45

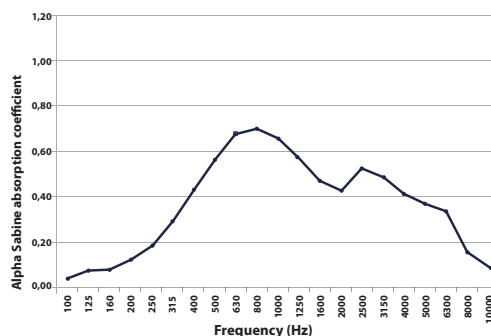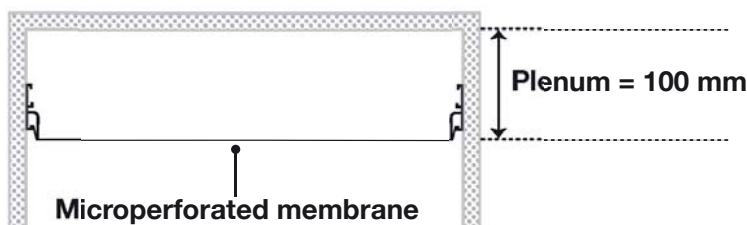


SCAN THIS CODE TO GET INFORMATION ABOUT THE PRODUCT: **ACOUSTIC STRETCH CEILING.**



ALMOST ALL NEWMAT STRETCH CEILING MEMBRANES CAN BE TREATED ACOUSTICALLY (MICROPERFORATION).

250 000 MICROPERFORATIONS / SQM. Provides the best ratio between sound absorption and mechanical strength of the membrane.



NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.

FDE&S FOR THE HQE® PROCEDURE

ENVIRONMENTAL AND HEALTH CHARACTERISTICS OF BUILDING PRODUCTS FOR THE HIGH ENVIRONMENTAL QUALITY PROCEDURE

SCAN THIS CODE TO GET INFORMATION ABOUT THE PRODUCT'S GUARANTEES : **ACOUSTIC STRETCH CEILING.**

NEWACOUSTIC membrane with acoustic absorber.



SOLUTION No.3

NEWACOUSTIC membrane
+ acoustic liner.



AlphaW = 0.70

NRC = 0.70

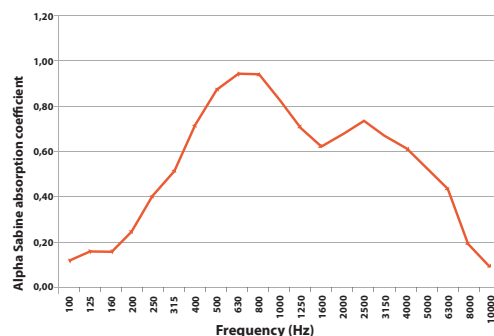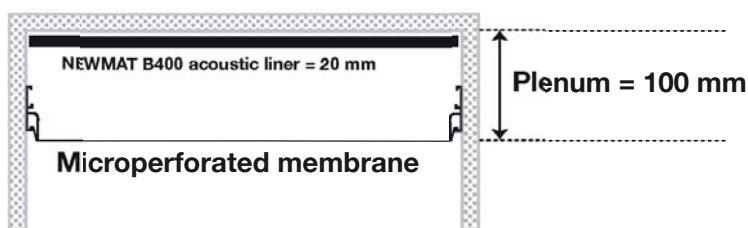



SOLUTION No.4

NEWACOUSTIC membrane
+ rock wool.



AlphaW = 0.75

NRC = 0.90

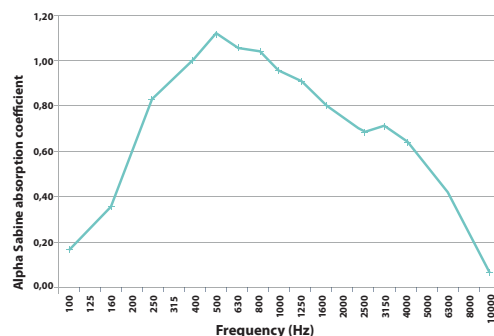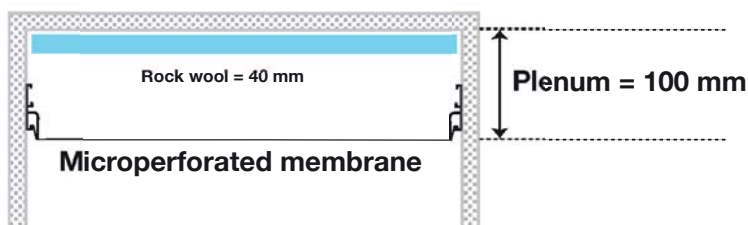

EUROPEAN STANDARD

EN 14716 valid since August 8th, 2005, gives right to the CE mark. All our fire rated references benefit from the fire rating : EUROCLASSE B, s2, d0. N° F090990-CEMATE/13.

FRENCH STANDARD FOR INSTALLATION

The ADEPPT with the help of the relevant unions* contributed to the elaboration of the DTU 58-2 «Stretch Ceilings», *the AFNOR, the SFEC (French Syndicate of Coaters and Calenderers), the SNAFAPT (the national syndicate of PVC stretch ceiling manufacturers), and the SNEPPT (the national syndicate of stretch ceiling installers). NEWMAT IS MEMBER of the SNAFAPT (the national syndicate of PVC stretch ceiling manufacturers).



WHITE ACOUSTIC PRODUCT LINE




Plafond tendu à usage intérieur N° de certificat: 0334-DPC-1004
 Réaction au feu: CLASSE B, s2, d0
 Dégagement de substances dangereuses: Essai satisfaisant
 Perméabilité à la vapeur d'eau: NPd
 Susceptibilité au développement de micro-organismes: NPd
 Durabilité: Essai satisfaisant




5

*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.



ACM15

BLANC MAT




ACL1

BLANC LAQUÉ




ACS600

SATINÉ BLANC NEIGE




ACTOB3

TRANSLUCIDE BLANC



ACS601 SATINÉ BLANC DOUCEUR



ACM18 MAT TILLEUL



ACM17 MAT LYS



GLOSSY ACOUSTIC FINISH




Plafond tendu à usage intérieur
 Réaction au feu: CLASSE B, s2, d0
 Dégagement de substances dangereuses: Essai satisfaisant
 Perméabilité à la vapeur d'eau: NPD
 Susceptibilité au développement de micro-organismes: NPD
 Durabilité: Essai satisfaisant

N° de certificat: 0334-DPC-1004



7

*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.

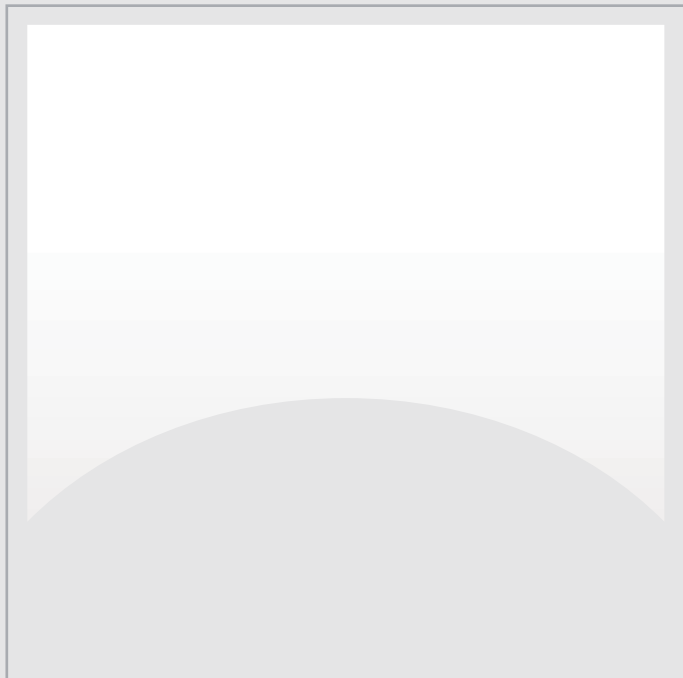

ACL1 BLANC



ACL400 NOIR



ACL9 PAILLE



ACL44 CITRON




ACL10 ABRICOT




ACL13 MANGUE




ACL45 CAPUCINE




ACL54 TOURAINE




ACL19 BORDEAUX



ACL21 VERMILLON



ACL57 CACAO



ACL37 LIE DE VIN




GLOSSY ACOUSTIC FINISH



Plafond tendu à usage intérieur N° de certificat: 0334-DPC-1004
 Réaction au feu: CLASSE B, s2, d0
 Dégagement de substances dangereuses: Essai satisfaisant
 Perméabilité à la vapeur d'eau: NPD
 Susceptibilité au développement de micro-organismes: NPD
 Durabilité: Essai satisfaisant




*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.

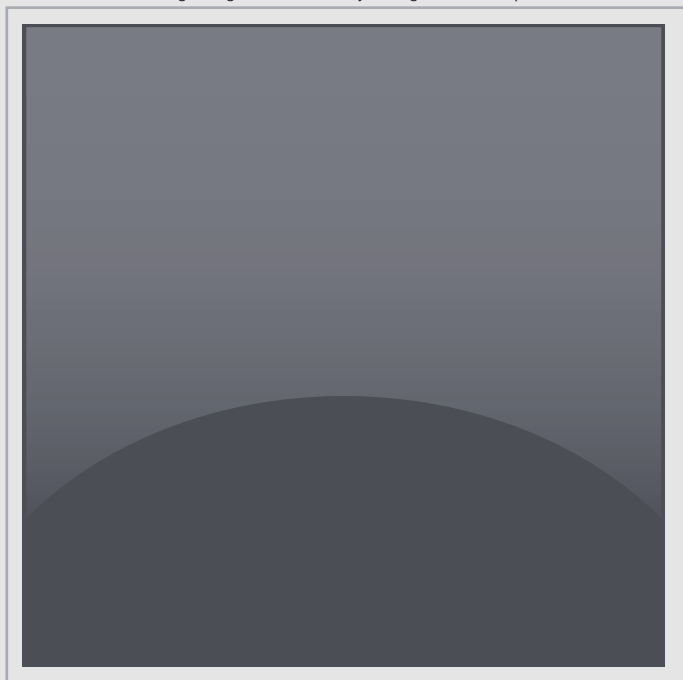

ACL41

PLOMB

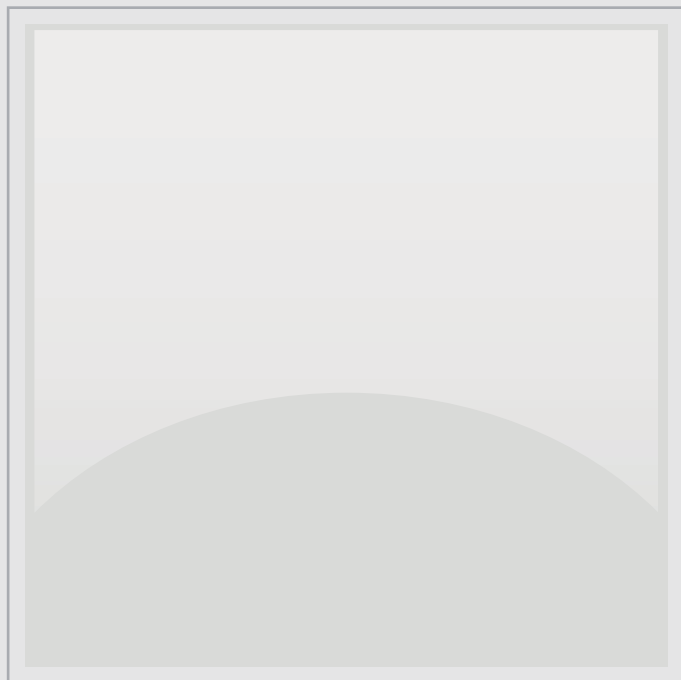

ACL53

FUMEE




ACL22

MASTIC




ACL5

LYTCHEE



ACL15

TENERE



ACL2

PERLE



ACL42

NOISETTE



ACL35

PRALINE



ACL36

BOIS DE ROSE



ACL43

PECHE



ACL16

AZALEE



ACL18

ROSE INDIEN



GLOSSY ACOUSTIC FINISH



Plafond tendu à usage intérieur N° de certificat: 0334-DPC-1004
 Réaction au feu: CLASSE B, s2, d0
 Dégagement de substances dangereuses: Essai satisfaisant
 Perméabilité à la vapeur d'eau: NPD
 Susceptibilité au développement de micro-organismes: NPD
 Durabilité: Essai satisfaisant



*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.




ACL39

PARME




ACL51

COBALT




ACL26

PISCINE




ACL25

FRANCE



ACL50

OUTREMER



ACL24

MARINE




ACL38

MYOSOTIS




ACL28

CARAIBE




ACL49

PETROLE




ACL23

NUIT




ACL46

VERT D'EAU




ACL32

ABSINTHE




ACL47

TWING



ACL29

VERT ANGLAIS



NEWLIGHT ACOUSTIC PRODUCT LINE

TRANSLUCENT ACOUSTIC STRETCH CEILING




THE NEWLIGHT TRANSLUCENT STRETCH CEILING GIVES YOU THE POSSIBILITY TO PLAY WITH LIGHT.



©Iwan Baan

Technical advice on the installation of the NEWLIGHT ceiling.

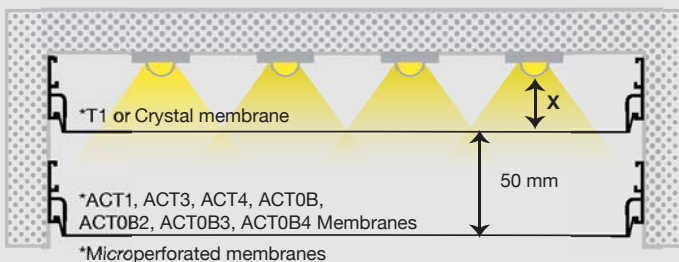



X : Distance light source/membrane: depends on the light beam.




NEWLIGHT ACOUSTIC PRODUCTLINE

TRANSLUCENT ACOUSTIC STRETCH CEILING

13




*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.

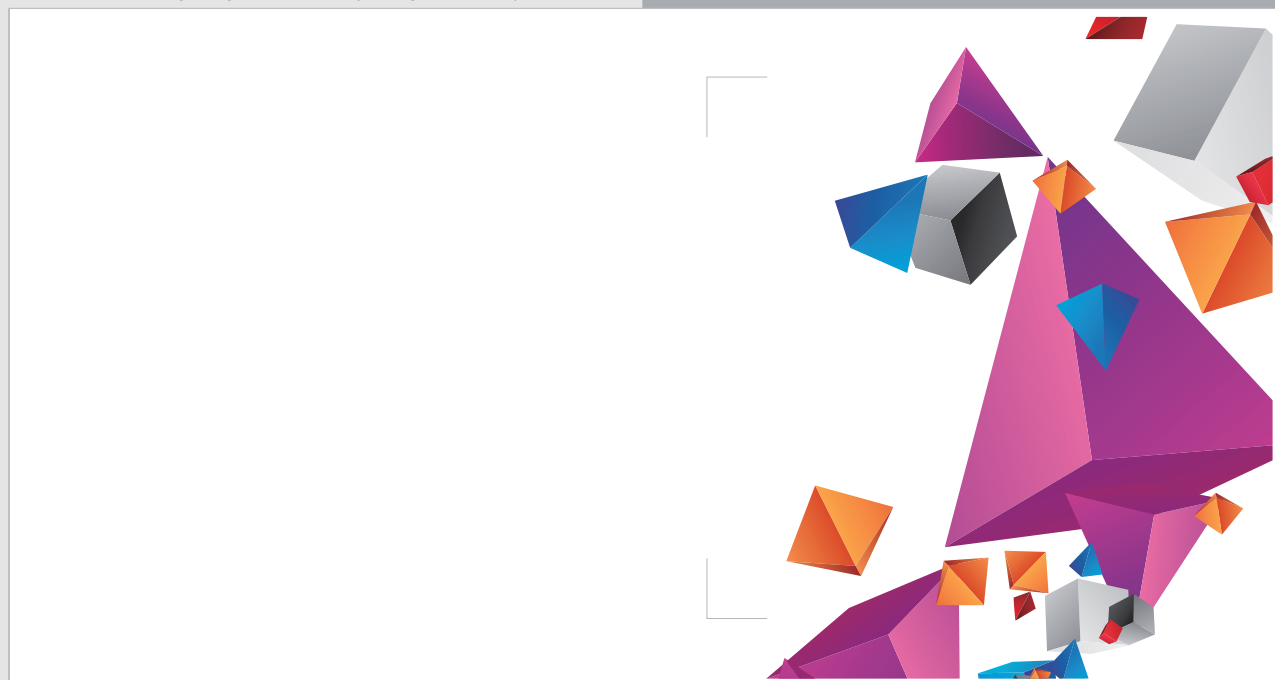


ACTOB3 TRANSLUCIDE BLANC


ACTOB3 TRANSLUCIDE BLANC IMPRIMÉ




ACT3 * BLEU




ACTOB BLANC




ACT1 * NATUREL



ACTOB2 BLANC



ACTOB4 BLANC



ACT4 * VERT

MATTE ACOUSTIC FINISHES



Plafond tendu à usage intérieur N° de certificat: 0334-DPC-1004
 Réaction au feu: CLASSE B, s2, d0
 Dégagement de substances dangereuses: Essai satisfaisant
 Perméabilité à la vapeur d'eau: NPd
 Susceptibilité au développement de micro-organismes: NPd
 Durabilité: Essai satisfaisant



15

*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.




ACM18

MAT TILLEUL




ACM20

MAT EBENE



ACM15

BLANC MAT



ACM16

MAT COQUILLE D'OEUF



ACM17

MAT LYS








SATIN ACOUSTIC FINISHES



Plafond tendu à usage intérieur N° de certificat: 0334-DPC-1004
 Réaction au feu: CLASSE B, s2, d0
 Dégagement de substances dangereuses: Essai satisfaisant
 Perméabilité à la vapeur d'eau: NPD
 Susceptibilité au développement de micro-organismes: NPD
 Durabilité: Essai satisfaisant



*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.



ACS600

SATINÉ BLANC NEIGE



ACS601

SATINÉ BLANC DOUCEUR




ACS611

VANILLE



ACS612

ANANAS



ACS615

CREME




ACS610 PAMPLEMOUSSE




ACS614

SAUMON



ACS609

GRENADINE




ACS608

COCO




ACS616

OCRE ROUGE



ACS618

OPALE



ACS605

KIWI




ACS604

AMANDINE



ACS613

BLEU PASTEL

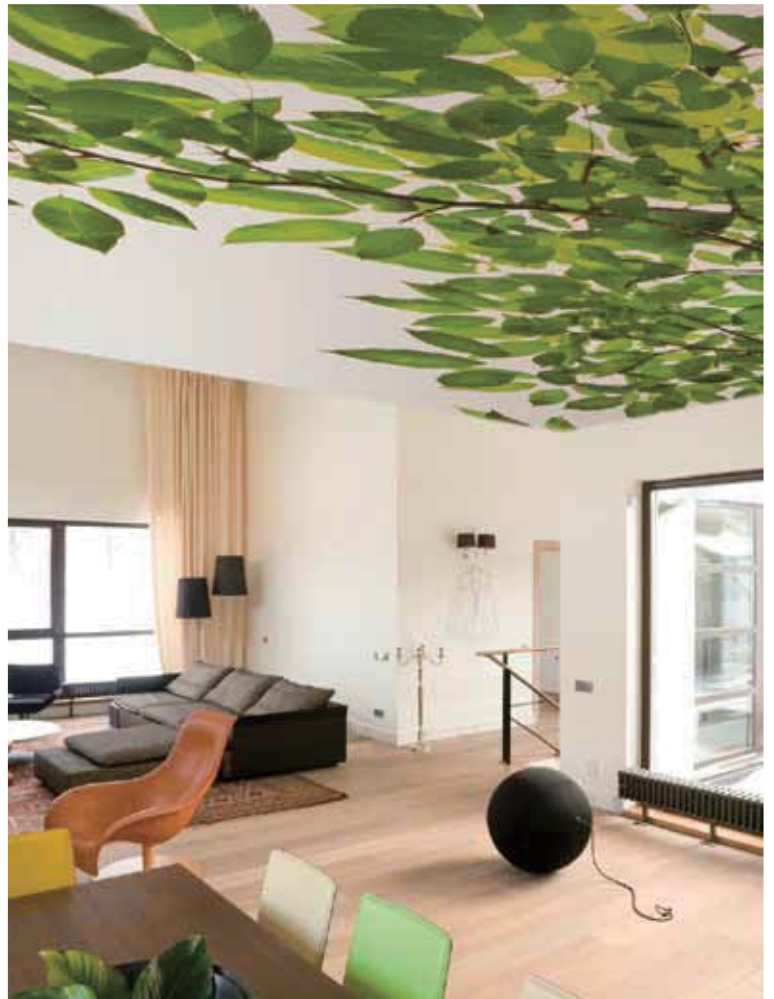



NEWGRAPHIC ACOUSTIC PRODUCT LINE

ACOUSTIC PRINTED STRETCH CEILINGS

21

EXCLUSIVE NEWGRAPHIC PICTURES AT
WWW.NEWMAT.COM

CHOOSE FROM OVER 20,000,000 PICTURES AVAILABLE IN HIGH QUALITY
> CHECK DATABANK FOR PICTURE OF YOUR CHOICE

NEWMAT, YOUR EXPERT FOR STRETCH CEILINGS

...with its NEWGRAPHIC product line NEWMAT reinvents the concept of painted ceilings. Using modern printing techniques (photo like quality), NEWGRAPHIC allows companies and individuals to personalize their stretch ceiling.

Choose from among millions of pictures available in high quality :

- > Exclusive Newgraphic pictures on www.newmat.com
- > The picture of your choice from an internet data bank (contact us).



SCAN THIS CODE TO DISCOVER THE IMAGES
AVAILABLE ON LINE : **NEWGRAPHIC ACOUSTIC
STRETCH CEILING**



BIOPRUF ACOUSTIC PRODUCT LINE

THE ACOUSTIC STRETCH CEILING FOR YOUR COMFORT



Plafond tendu à usage intérieur
N° de certificat: 0334-DPC-1004
Réaction au feu: CLASSE B, s2, d0
Dégagement de substances dangereuses: Essai satisfaisant
Perméabilité à la vapeur d'eau: NP0
Susceptibilité au développement de micro-organismes: NP0
Durabilité: Essai satisfaisant



*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.


THANKS TO THE ANTIMICROBIAL AND ANTIFUNGAL TREATMENTS INTEGRATED INTO THE VERY CORE OF THE STRETCH CEILING, THE NEWMAT BIO-PRUF PROCESS ENSURES AN EXCELLENT HYGIENE, ALL THE WHILE LOOKING GREAT. IT IS ENDORSED BY THE PUBLIC AUTHORITIES.





*NEWMAT stretch ceilings are guaranteed for 10 years against seam ruptures.

BIOPRUF MATTE ACOUSTIC FINISHES




ACM15 BIO

BLANC MAT




ACT0B2 BIO TRANSLUCIDE




ACS601 BIO

BLANC
DOUCEUR

BIOPRUF SATIN ACOUSTIC FINISHES




ACS610 BIO PAMPLEMOUSSE



ACS612 BIO

ANANAS




ACS614 BIO

SAUMON




ACS609 BIO

GRENADINE



ACS608 BIO

COCO



ACS604 BIO

AMANDINE

SELF-CARRYING NEWSPOTS.

Patented system. Available exclusively from NEWMAT.

24

No structure, no adjustment, can be dismantled.
For flat and 3D shaped ceilings.


NEWSPOT FIX

by NEWMAT



Thickness : 12 mm

Installed thickness : 5 mm
IP20



Ø 51 mm
220V
Fluo 7W
12V
LED
3 or 6 W



Description of the kit

- 1 spot (black, gold, white or chrome)
- 1 high temperature ring
- 1 socket
- 1 circlip
- 1 lamp 12V
- 1 electric Transformer
- 1 Transformer holder

BLACK

GOLD

WHITE

CHROME




NEWSPOT PIVOTING

by NEWMAT



Thickness : 15 mm

Installed thickness : 5 mm
IP20



Ø 51 mm
220V
Fluo 7W
12V
LED
3 or 6 W



Description of the kit

- 1 spot (black, gold, white or chrome)
- 1 high temperature ring
- 1 socket
- 1 circlip
- 1 lamp 12V
- 1 electric Transformer
- 1 Transformer holder

BLACK

WHITE

GOLD

CHROME



01

A hand holding a black marker is shown drawing a circle on a white surface. The circle is partially completed, with the marker tip still touching the line.

02



A diagram showing a diamond-shaped plate with a central hole. A vertical rod passes through the hole, and a ring is attached to the bottom of the rod.

03



04



05



Fastening 1/4 turn

Fastening 1/4 turn



The diagram shows a cross-section of a structure. At the top, there is a dark, dome-shaped component with two vertical lines extending upwards from its center. Below this dome is a horizontal white rectangular section. This white section is supported by two dark, vertical, tapered legs that extend downwards. The entire assembly is positioned between two horizontal lines, one above and one below the white section, suggesting it is part of a larger system or frame.

Self-carrying !















No structure.

Self-carrying !

No structure.

Available

Minimum quantity required

 Ghost ceiling rail PVC	 Ghost Tube rail	 Double Ghost rail for ceiling PVC	 Ghost wall rail aluminium	 Ghost wall rail PVC PVC
 Double Classic rail PVC	 Alux rail	 Ghost structure rail	 Elegance rail PVC	 Crown rail Flexible flap PVC
 Classic rail PVC	 Mirage rail PVC	 Ghost ceiling rail aluminium	 Double Ghost Tube rail	 Ghost Panel rail
 Ghost Round Tube rail	 Double Ghost Round Tube rail	 Ghost Framing rail	 Ghost Tubing rail TS	 Ghost Cube rail
 Ghost 4CRC rail	 Ghost Bullnose 13° rail	 Ghost Bullnose 45° rail		



SCAN THIS CODE AND DISCOVER INFORMATION ON
OUR PRODUCT GUARANTEES: **ACOUSTIC STRETCH
CEILING.**

NEWMAT CLASSIC

STRETCH CEILINGS

NEWMAT
CLASSIC

NEWLIGHT

STRETCH LUMINOUS
CEILINGS

NEW
LIGHT

NEWGRAPHIC

PRINTED STRETCH
CEILINGS

NEW
GRAPHIC

NEWLINE

PERFORATED STRETCH
CEILINGS

NEW
LINE
NATUREL - ART ET PLAFOND

BIOPRUF

STRETCH CEILINGS
FOR YOUR COMFORT

BIO
new
PRUF

BATINEWLINE

ARCHITECTURAL MESH
CEILING SYSTEMS

BATI
NEWLINE

MIR.O.DAL

PRE-STRETCHED CEILING
PANEL DOUBLE LAYER

MIR.O.DAL®

NEWMAT: certified installers at your service.

NEWACOUSTIC

ACOUSTIC STRETCH
CEILINGS

NEW
ACOUSTIC



SCAN THIS CODE AND DISCOVER PRODUCT INFORMATION :
ACOUSTIC STRETCH CEILING.

NEWCLIP'

STRETCH WALLS &
CEILINGS

NEW
Clip'
MURS & PLAFONDS

STRETCH CEILING SYSTEMS
newmat®
CEILING TECHNOLOGY AT ITS BEST

NEWMAT S.A.S 22 rue du Général Dame - BP 141 - 59482 HAUBOURDIN
Cedex FRANCE Tél : +33(0)3.20.50.70.06 - Fax : +33(0)3.20.50.98.03